

Tyres, wheels and hubs

10-1 Tyres and wheels

10-2 Hubs and axles

10-3 Mudguards



Summary of legislation

Applicable legislation

- Land Transport Rule: Tyres and Wheels 2001

Mandatory equipment

Tyres

1. Tyres must be compatible with the vehicle to which they are fitted.
2. Tyres on the same axle must be of the same size designation and construction, and of the same tread pattern type.
3. A vehicle of class MA, MB, MD1 or NA first registered or re-registered in New Zealand from 1/10/2002, must have all tyres of the same construction unless the vehicle is incapable of exceeding 30 km/h or is 30 years old or more.
4. Asymmetric tyres must be fitted in axle sets in accordance with manufacturer's instructions.
5. A unidirectional tyre must be fitted to a wheel position corresponding to its direction of rotation.
6. The speed category of a tyre must be compatible with the maximum legal speed limit for the vehicle, or the vehicle's maximum speed.
7. A vehicle must not be fitted with a metal tyre or other non-pneumatic tyre, or with a tyre with studs, cleats, lugs or other gripping devices.

Wheels

8. A wheel must:
 - a) be sufficiently strong for the type of vehicle to which it is fitted, and
 - b) be compatible with the vehicle to which it is fitted, and
 - c) be compatible with the tyre rim profile, flange height and valve fitment.
9. There must be adequate clearance for the brake, hub, suspension and steering mechanism and body parts.

Permitted equipment

10. A vehicle may be fitted with re-treaded tyres.

Condition

Tyres (excluding spare tyres and space-saver tyres)

11. A tyre must be of good quality and construction, fit for its purpose, and maintained in a safe condition.
12. A tyre must not have worn, damaged or visible cords apparent by external examination.
13. A tyre must have a tread pattern depth of not less than 1.5 mm (excluding any tie-bar or tread depth indicator strip) within all principal grooves containing moulded tread depth indicators and around the whole circumference of the tyre.
14. The regrooving of a tyre is permitted only if the tyre is identified as being specifically designed for regrooving after manufacture.
15. A tyre that is fitted to a vehicle must be maintained at a safe inflation pressure.

Reasons for rejection

Mandatory equipment

Tyres

1. Tyres on the same axle are:
 - a) not of the same size designation, or
 - b) not of the same construction (mixed steel ply, fabric radial ply, bias/cross ply), or
 - c) not of the same tread pattern type (mixed asymmetric, directional, normal highway, traction).
2. All the tyres on a vehicle class MA, MB, MD1 or NA that was first registered or reregistered in NZ from 1/10/2002, other than vehicles that are incapable of exceeding 30 km/h or are 30 years old or more, are not of the same construction.
3. The tyres on an axle of a light vehicle do not meet at least one of the following:
 - the tyre ply ratings are the same
 - the tyre load indices differ by no more than 2
(Note 3).
4. An asymmetric tyre is fitted to a vehicle with the 'inside' tyre wall facing outwards.
5. A unidirectional tyre is fitted contrary to its correct direction of rotation.
6. A tyre has a speed category that is less than the speed limit for the vehicle or less than the vehicle's maximum speed if this is less than the speed limit **(Note 3).**
7. The vehicle has one or more of the following types of tyre fitted:
 - a) a space-saver tyre, or
 - b) a non-pneumatic tyre, or
 - c) a tyre with studs, cleats, lugs or other gripping devices, or
 - d) a tyre that is marked with any of the following:
 - i. 'NOT FOR HIGHWAY USE'
 - ii. 'NHS' (Not for Highway Service)
 - iii. 'FOR TRAILER USE ONLY'
 - iv. 'ADV' (Agricultural Drawn Vehicle)
 - v. 'RACING PURPOSES ONLY'

Spare tyre

16. If the vehicle carries a spare tyre, the tyre must be securely attached on or in the vehicle.

Space-saver tyres

17. A space-saver tyre carried in a vehicle first registered in NZ from 1/10/2002 must have an approved safety warning label permanently attached.

18. A space-saver tyre carried in a vehicle first registered in NZ prior to 1/10/2002 must have an approved safety warning label permanently attached by 1/10/2003.

19. The space-saver tyre warning label must have safety instructions that:

- a) are printed clearly in English, and
- b) identify that the tyre is for temporary use only, and
- c) specify that the vehicle must not be operated with a space-saver tyre at a speed of more than 80 km/h or at a lesser speed specified by the tyre manufacturer, and
- d) contain information on the recommended inflation pressure of the tyre when in use.

Wheels

20. The components of the wheel assembly must be in good condition.

21. The wheel must be securely attached to the hub.

Modifications

22. A modification that affects the wheels or tyres must be inspected and certified by an LVV specialist certifier, unless the vehicle is:

- a) excluded from the requirement for LVV specialist certification (**Table 10-1-1**), and has been inspected in accordance with the requirements in this manual, including those for equipment, condition and performance, or
- b) fitted with a wheel spacer that is approved for the purpose by the vehicle, wheel or axle manufacturer, or
- c) fitted with a hand-grooved tyre, provided the tyre was a blank tyre case manufactured for hand-grooving, and complies with the applicable listed requirements.

Reasons for rejection**Wheels**

8. A wheel is not compatible with the tyre fitted to it for rim profile, flange height, or valve fitment.

Condition**Tyres (excluding spare tyres and space-saver tyres)**

10. A tyre shows any of the following damage:
- a) a lump or bulge that is likely to be caused by separation or partial failure of the tyre structure, or
 - b) a cut or crack in a sidewall or tread more than 25 mm long that reaches the cords, or
 - c) exposed or cut cords, or
 - d) the tread of a retreaded tyre shows signs of separation, or
 - e) nails or other sharp objects embedded in the tyre.
11. A tyre has a string type repair visible from the outside.
12. A tyre does not have a tread pattern depth of at least 1.5 mm (excluding any tie-bar or tread depth indicator strip) around the whole circumference of the tyre:
- a) within all the principal grooves that normally contain moulded tread depth indicators, or
 - b) if the tyre does not normally have moulded tread depth indicators (such as some retreaded or vintage tyres), across at least three-quarters of the tread width.
13. A tyre not identified as designed for regrooving has had its tread depth increased by regrooving.
14. A tyre is noticeably under- or over-inflated.

Spare tyres

15. A spare tyre, if carried:
- a) is not securely attached by a device that is in good condition and correctly applied, or
 - b) is not (eg if the manufacturer's attachment device is missing or faulty) stowed in a closed compartment separate from the occupant space.

Space-saver tyres

16. A space-saver tyre does not have an approved safety warning label (see **Figure 10-1-2**) permanently attached.

Reasons for rejection

17. The space-saver tyre warning label does not have safety instructions that meet all of the following:
- are printed clearly in English
 - identify that the tyre is for temporary use only
 - specify that the vehicle must not be operated with a space-saver tyre at a speed of more than 80 km/h or at a lesser speed specified by the tyre manufacturer
 - contain information on the recommended inflation pressure of the tyre when in use.

Wheels

18. There are signs that a wheel is fouling on another part of the vehicle.
19. A wheel is:
- a) cracked, or
 - b) significantly damaged, distorted or deteriorated, or
 - c) not securely attached to the hub.
20. An alloy wheel has poor visible repairs.
21. A wheel nut is:
- a) missing, or
 - b) loose, or
 - c) deteriorated, or
 - d) the incorrect type, or
 - e) has insufficient thread engagement to the wheel stud.

Modifications

22. A modification affects the wheels or tyres, and:
- a) is not excluded from the requirements for LVV specialist certification (**Table 10-1-1**), and
 - b) is missing proof of LVV specialist certification, ie:
 - i. the vehicle is not fitted with a valid LVV certification plate, or
 - ii. the operator is not able to produce a valid modification declaration or authority card.

Table 10-1-1. Modifications that do not require LVV certification

Fitting of or modification to:	LVV certification is not required provided that:
Aftermarket wheel fitments ¹	<ul style="list-style-type: none"> • the wheels: <ul style="list-style-type: none"> – are a known and reputable brand non-OE item, and – would be considered an appropriate fitment for the vehicle type by the wheel manufacturer, and – are not modified, and – spacers or adaptors are not fitted. • the tyre tread: <ul style="list-style-type: none"> – does not protrude beyond the unmodified original body panels (including unmodified factory-fitted mudguard extensions), or – protrudes beyond the unmodified original body panels, but is covered by aftermarket or modified mudguard extensions or modified body panels, and the track width has increased by no more than 25 mm from OE.
Tyre size changes	<ul style="list-style-type: none"> • the tyres: <ul style="list-style-type: none"> – have an outer circumference that is no more than 5% greater than OE, and – are an appropriate selection for rim width, and – have tread that does not extend beyond the original or modified body panels or guard extension (see Figure 10-1-1).
Fitting of or modification to:	LVV certification is never required:
Any modification for the purposes of law enforcement or the provision of emergency services	<ul style="list-style-type: none"> • in-service requirements for condition and performance must be met.

¹ the vehicle inspector may refer the vehicle to an LVV certifier if the inspector has reasonable concerns that the safety of the vehicle has been affected by an aftermarket wheel fitment.

Note 1 Tread pattern and tread depth requirements do not apply to vehicles that are not capable of exceeding 30 km/h.

Note 2 Definitions:

Asymmetric tyre: tyre which, through tread pattern or construction, is required to be fitted to a vehicle so that one particular side wall faces outwards.

Construction in relation to a tyre:

- a) for a pneumatic tyre, the type of tyre carcass (including ply orientation and ply rating or load index); or
- b) for any other tyre, characteristics relating to size, shape and material.

Cross-ply: a pneumatic tyre structure in which the ply cords in the tyre carcass extend to the beads and are laid at alternate angles, which are substantially less than 90 degrees, to the centre-line of the tread. This tyre structure is also referred to as 'bias ply' or 'diagonal ply'.

Modify means to change a vehicle from its original state by altering, substituting, adding or removing a structure, system, component or equipment, but does not include repair.

Pneumatic tyre: a tyre that, when in use, is inflated by air or gas introduced from time to time under pressure so as to enclose under normal inflation a cushion of air or gas forming altogether at least half of the total area of an average cross-section of a tyre so inflated.

Principal Grooves means the wide grooves in the tyre tread which have the tread wear indicators located inside them. Any other grooves are secondary grooves which may wear out during the service life of the tyre.

Radial-ply: a pneumatic tyre structure in which the ply cords, which extend from bead to bead, are laid at approximately 90 degrees to the centre-line of the tread, the carcass being stabilised by an essentially inextensible circumferential belt.

Repair means to restore a damaged or worn vehicle, its structure, systems, components or equipment to within safe tolerance of its condition when manufactured, including replacement with undamaged or new structures, systems, components or equipment.

Rim: that part of the wheel on which the tyre is mounted and supported.

Speed category means a code allocated to a tyre by a tyre manufacturer that indicates the maximum vehicle speed for which the use of the tyre is rated.

Temporary-use spare tyre: a combination tyre and wheel designed and constructed solely for temporary use under restricted driving conditions, and not intended for use under normal driving conditions. (Commonly known as a 'space-saver tyre')

Tread means that part of a pneumatic tyre which comes into contact with the ground.

Tread depth indicator (or tread wear indicator) means the projections within the principal grooves designed to give a visual indication of the degree of wear of the tread. To help locate these on a tyre, inspectors should look for a "Δ" or "TWI" mark on the outer edge of the tyre side wall (most tyres have these marks).

Tube: an inflatable elastic liner, in the form of a hollow ring fitted with an inflation valve assembly, designed for insertion into certain tyre assemblies to provide a cushion of air or gas, that, when inflated, supports the wheel. (Also known as an 'inner tube')

Tyre carcass: that structural part of a pneumatic tyre other than the tread and outermost rubber of the sidewalls that, when inflated, contains the gas that supports the load.

Tyre load rating: the maximum load a tyre can carry at the corresponding cold inflation pressure prescribed by the tyre manufacturer and the speed indicated by its speed category symbol.

Wheel: a rotating load-carrying member between the tyre and the hub, which usually consists of two major parts, the rim and the wheel disc, and which may be manufactured as one part, or permanently attached to each other, or detachable from each other.

Wheel centre-disc: that part of the wheel that is the supporting member between the hub and the rim.

Wheel spacer: an additional component used for the purpose of positioning the wheel centre-disc relative to the hub, or in multiple wheel sets, for the purpose of positioning the wheel centre-disc relative to another wheel.

Note 3 The tyre load index and speed category are usually marked on the tyre. Where the tyre is not marked, the load and speed rating information must be obtained from the tyre manufacturer or a reference guide of tyre ratings before the tyre can be passed.

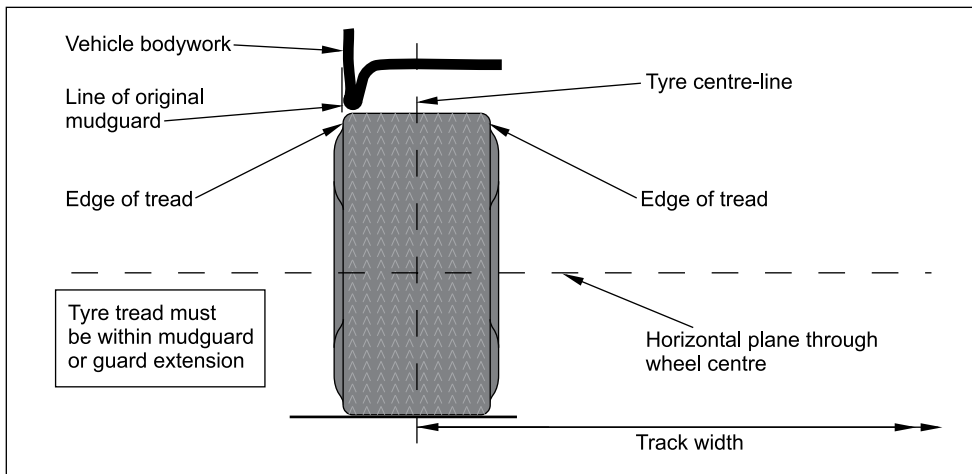


Figure 10-1-1. Tyre and body panel position



Figure 10-1-2. Approved space-saver tyre labels

(Note: See NZTA website for colour versions and any additional approved labels.)

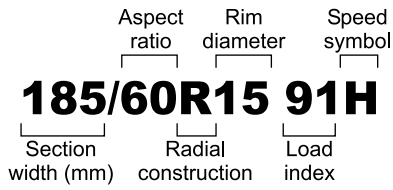


Figure 10-1-3. Tyre markings

Table 10-1-2. Tyre speed symbol categories

Speed symbol – speed category (km/h)							
A1 – 5	A5 – 25	B – 50	F – 80	L – 120	Q – 160	U – 200	Y – 300
A2 – 10	A6 – 30	C – 60	G – 90	M – 130	R – 170	H – 210	ZR – over 240
A3 – 15	A7 – 35	D – 65	J – 100	N – 140	S – 180	V – 240	
A4 – 20	A8 – 40	E – 70	K – 110	P – 150	T – 190	W – 270	

Table 10-1-3. Tyre interchangeability – imperial and metric

Imperial sizing	Metric sizing
10/70R22.5	255/70R22.5
11/70R22.5	275/70R22.5
12/70R22.5	305/70R22.5
15R22.5	385/65R22.5
16.5R22.5	425/65R22.5

Summary of legislation

Applicable legislation

- Land Transport Rule: Tyres and Wheels 2001
- Goods Service Vehicle (Constructional) Regulations 1936

Mandatory and permitted equipment

1. Refer to general vehicle pages.
2. Individual tyres of multiple tyre sets on groundspreader or dedicated groundsprayer may be of different sizes or construction in the same set, but each multiple tyre set must be the same as the other multiple tyre set on the same axle.

Condition

3. Refer to general vehicle pages.

Performance

4. Refer to general vehicle pages.

Modification and repair

5. A modification or repair that affects the tyres or wheels must be inspected and certified by a HVS certifier of category HVEC, HVMC or HVIC, unless the vehicle:
 - a) excluded from the requirement for HVS certification (**Table 10-1-4**), and
 - b) has been inspected in accordance with the requirements in this manual, including those for equipment, condition and performance.

Reasons for rejection

Mandatory and permitted equipment

1. Refer to general vehicle pages.
2. On a groundspreader or dedicated groundsprayer fitted with multiple tyre sets that are made up of tyres of different size or construction:
 - a) the tyre sets are not fitted so that those on one end of the axle mirror those fitted at the other end of the axle.
3. The tyres on an axle do not meet at least one of the following:
 - the tyre ply ratings:
 - i. are the same on a class MD3 vehicle
 - ii. differ by no more than 2 on a vehicle other than class MD3
 - the tyre load indices:
 - i. differ by no more than 2 on a class MD3 vehicle
 - ii. differ by no more than 6 on a vehicle other than class MD3
 - where no load index is indicated, the tyre load ratings (kg) on an axle differ by no more than 21% of the lowest rating.

Condition

4. Refer to general vehicle pages.

Performance

5. Refer to general vehicle pages.

Modification and repair

6. A modification or repair affects the tyres and wheels and:
 - a) is not excluded from the requirements for HVS certification (**Table 10-1-4**), or
 - b) the modification is not for the purpose of law enforcement or the provision of emergency services, or
 - c) is missing proof of HVS certification, ie:
 - i. the vehicle was modified or repaired before the last CoF inspection and no LANDATA record has been entered, or
 - ii. the vehicle was modified or repaired since the last CoF inspection and no valid LT400 form from a HVS certifier of category HVEC, HVMC or HVIC has been presented.

Table 10-1-4. Requirements for HVS certification

HVS certification is required	HVS certification is not required
<ol style="list-style-type: none"> 1. increase of track width beyond vehicle manufacturer's specified limits 2. fitting of tyres additional to the limit specified by the vehicle manufacturer 3. Modified wheels (including fitting of different rims) 	<ol style="list-style-type: none"> 1. Modified wheels with written evidence from the vehicle manufacturer that the complete assembly of tyre, hub and axle is within the vehicle manufacturer's operating limits. Such approval is likely to contain the approved tyre and wheel sizes and the maximum track, separately for all axles, together with the maximum number of wheels fitted to one axle, and may also include a few restrictions such as reduced axle load etc. 2. Retrofitting a tyre pressure control system in accordance with the equipment manufacturer's instructions. 3. Fitting a regrooved tyre identified as specifically designed and constructed for the process of regrooving after manufacture 4. Any modification or repair likely to have been carried out before 1/1/1997, (modifications and repairs before this date generally required certification but for inspection purposes no evidence of this is required.) 5. Any repair or modification not listed in the left-hand column unless the VI considers that certification is required because the modification or repair has affected the vehicle's safety performance (a second opinion from an expert may be needed, eg the manufacturer's representative, reputable workshop).

Note 1 Definitions

Central tyre inflation system means a type of tyre pressure control system that adjusts tyre pressure for the purpose of inflating and deflating tyres to improve tyre adhesion and reduce road surface damage and is under the central control of the driver or an automated system, or a combination of both the driver and an automated system. (Commonly known as 'CTI')

Dedicated groundsprayer means a self-propelled or trailing machine whose sole function is the application of chemicals or liquid fertiliser to crops or to the ground.

Groundspreader means a vehicle designed specifically for the carriage of powder or particulate artificial fertilisers on the road, and for the distribution of those fertilisers directly from the vehicle onto the land by means of a mechanical or pneumatic distributor that forms part of the vehicle.

Summary of legislation

Applicable legislation

- Land Transport Rule: Tyres and Wheels 2001

Condition

1. The components of the assembly must be in good condition.
2. The hub and axle must be sufficiently strong for the type of vehicle to which they are fitted.
3. The hub and axle must have a suitable and correctly adjusted geometry.

Modification

4. A modification that affects the hubs or axles must be inspected and certified by a low volume vehicle specialist certifier, unless the vehicle:
 - a) is excluded from the requirement for LVV specialist certification (**Table 10-2-1**),
 - b) and has been inspected in accordance with the requirements in this manual, including those for equipment, condition and performance.

Reasons for rejection

Condition

1. A hub :
 - a) is not securely attached to the vehicle, or
 - b) has a visible crack, or
 - c) is significantly damaged, distorted or deteriorated, or
 - d) has a broken or missing wheel stud.
2. A wheel bearing:
 - a) has play beyond the manufacturer's specifications, or
 - b) is over-tight or sounds rough.
3. An axle:
 - a) is insecure, eg has loose U-bolts, or
 - b) is visibly cracked, or
 - c) is significantly damaged, distorted or deteriorated, or
 - d) shows signs of welding or heating after original manufacture, or
 - e) shows signs of fouling the vehicle structure or a brake, suspension or steering component.

Performance

4. The geometry of a hub or axle causes:
 - a) the vehicle to veer significantly to one side, or
 - b) the wheels not to self centre.

Modification

5. A modification affects the hubs or axles, and:
 - a) is not excluded from the requirements for LVV specialist certification (**Table 10-2-1**), and
 - b) is missing proof of LVV specialist certification, ie:
 - i. the vehicle is not fitted with a valid low volume vehicle certification plate, or
 - ii. the operator is not able to produce a valid modification declaration or authority card.

Table 10-2-1. Modifications that do not require LVV certification

Fitting of or modification to:	LVV certification is not required provided that:
Differential ratio changes	<ul style="list-style-type: none"> • only the differential centre or gear-set is changed, and • the OE axle housing is retained.
Axle housing replacement	<ul style="list-style-type: none"> • the axle housing fits the vehicle without adaptation, and • no change to the OE suspension geometry occurs, and • no changes are made to the OE brake system.

Fitting of or modification to:	LVV certification is never required:
Any modification for the purposes of law enforcement or the provision of emergency services	<ul style="list-style-type: none"> • in-service requirements for condition and performance must be met.

Note 1 Definitions

Hub means the part of a vehicle that is attached to the axle and rotates on, or with, the axle, and to which the wheel is attached, and includes any bearings.

Modify means to change a vehicle from its original state by altering, substituting, adding or removing a structure, system, component, or equipment, but does not include repair.

Repair means to restore a damaged or worn vehicle, its structure, systems, components or equipment to within safe tolerance of its condition when manufactured, including replacement with undamaged or new structures, systems, components or equipment.

Summary of legislation

Applicable legislation

- Land Transport Rule: Vehicle Dimensions and Mass 2002
- Land Transport Rule: Heavy Vehicles 2004

Mandatory and permitted equipment (Note 1)

1. A rigid heavy vehicle must be supported by a front single or twin-steer axle set, and by a rear single, tandem or tri-axle set.
2. The axle sets, except a twin-steer axle set, of a heavy vehicle must be load sharing.
3. A tandem axle set with a large single-tyred axle must have a manufacturer's indelible plate clearly visible to the person weighing the vehicle that specifies the:
 - a) load-share ratio of the axle set of 60:40 or 55:45, and
 - b) tyre size on each axle, and
 - c) maximum individual axle ratings.
4. A heavy vehicle must not have any rear steering axles, except if the vehicle is:
 - a) a mobile crane, or
 - b) the rear unit of an articulated bus, or
 - c) a rigid vehicle without a heavy tow coupling provided no more than half of the axles within the rear axle set steer at any one time, or
 - d) a specialist vehicle designed to transport overdimension or overweight load, or to primarily carry out a specialist function that requires overdimension equipment.
5. A mobile crane must have at least one rear axle capable of being locked so that it is non-steering.
6. A heavy vehicle not towing an A-train or B-train may have a retractable axle in its rear axle set.
7. A device for altering the distribution of mass between axles may only be fitted to a vehicle if the device:
 - a) lifts an unpowered axle clear of the ground, or
 - i. reduces the mass carried by an unpowered axle without lifting it clear of the ground, and
 - ii. is a control that is spring loaded, so that when the control is released the mass on the unpowered axle reverts to what it was before the operation of the controls, or
 - b) has a control with an automatic timing device with an activation time of not more than two minutes after which the mass on the unpowered axle reverts automatically to what it was before the operation of the control, and with a non-activation time of at least 30 seconds during which the control cannot be activated again.
8. A sliding axle set must be fitted with both:
 - a) an effective locking device to prevent inadvertent separation or extension, and
 - b) endstops at the end of the slideway to prevent the separation of the sliding parts if the primary locking device fails.

Reasons for rejection

Mandatory and permitted equipment (Note 1)

1. A rigid heavy vehicle is not supported by:
 - a) a single or twin-steer axle set at the front, or
 - b) a single, tandem or tri-axle set at the rear.
2. An axle set, other than a twin-steer axle set, is not load sharing.
3. The manufacturer's plate for a tandem axle set with a twin-tyred axle and a large single-tyred axle (where these were fitted from 1/7/2002):
 - a) is missing, or
 - b) is not legible, or
 - c) does not show:
 - i. the load-share ratio of the axle set, or
 - ii. a ratio that is either 60:40 or 55:45, or
 - iii. the tyre size on each axle, or
 - iv. the maximum individual axle ratings, or
 - d) has details that do not match the vehicle.
4. A heavy vehicle is fitted with one or more rear steering axles, and the vehicle is not one of the following types:
 - a mobile crane
 - the rear unit of an articulated bus
 - a rigid vehicle without a heavy tow coupling provided no more than half of the axles within the rear axle set steer at any one time
 - a specialist vehicle designed to transport overdimension or overweight load, or to primarily carry out a specialist function that requires overdimension equipment.
5. A mobile crane does not have at least either a non-steering axle or a steering axle capable of being locked so that it is non-steering.
6. A heavy vehicle is presented towing an A-train or B-train and is fitted with a retractable axle in its rear axle set.
7. A device for altering the distribution of mass between axles has been fitted to the vehicle when:
 - a) the device does not lift an unpowered axle clear of the ground, or

Permitted equipment

9. A vehicle may be fitted with a ballrace turntable.

Condition

10. Refer to general vehicle pages.
11. An axle fitted to a vehicle must have adequate strength and performance characteristics for all conditions of loading and operation for which the vehicle was constructed.
12. The locking of a sliding axle locking device must be readily verifiable by visual inspection, or the vehicle must be equipped with visual or audible alarm to warn the driver if the equipment is not locked in one of the locking positions.

Performance

13. An alarm must be visible or audible from the driver's seating position, and the alarm must operate when the vehicle's engine is running, except when the parking brake is fully applied or when the gear selector of a vehicle with an automatic transmission is in the 'park' position.
14. If the sliding axle set locking device incorporates a system that provides energy for its operation, the device must remain fully engaged in the locking position, or the locking action must be initiated immediately, if the energising system fails
15. Refer to general vehicle pages.

Modification and repair

16. A modification or repair that affects the hubs or axles must be inspected and certified by a HVS certifier of category HVEC, HVMC or HVIC, unless the vehicle:
 - a) excluded from the requirement for HVS certification (**Table 10-2-2**), and
 - b) has been inspected in accordance with the requirements in this manual, including those for equipment, condition and performance.

Reasons for rejection

- b) the device reduces the mass carried by an unpowered axle without lifting it clear of the ground, but the device:
 - i. does not have a spring-loaded control, ie when the control is released, the mass on the unpowered axle does not revert to what it was before the operation of the control, or
 - ii. does not have a control with an automatic timing device with an activation time of not more than two minutes after which the mass on the unpowered axle reverts automatically to what it was before the operation of the control, and with a non-activation time of at least 30 seconds during which the control cannot be activated again.
8. A sliding axle set is not fitted with both:
 - a) an effective locking device to prevent inadvertent extension or separation, and
 - b) endstops at the end of the slideway to prevent separation of the sliding parts if the primary locking device fails.

Condition

9. Refer to general vehicle pages.
10. A sliding axle assembly is deteriorated, eg:
 - a) a chassis rail/guide, locking pin or other component is missing, deformed, cracked, or otherwise worn or damaged, or
 - b) a locking pin is too small or too short, or
 - c) there is an air leak from the lock pin air ram.
11. A locking of a sliding axle locking device is not either:
 - a) readily verifiable by visual inspection; or
 - b) the vehicle is not equipped with a visual or audible alarm to warn the driver if the axle is not locked in one of the locking positions (**Note 2**).
12. A sliding axle locking device is bent, worn or otherwise damaged or deteriorated so that it is not effective.
13. A sliding axle locking device does not operate correctly.
14. A sliding axle end stop is:
 - a) missing, or
 - b) insecure, or
 - c) damaged.

Performance

15. Refer to general vehicle pages.

Modification and repair

16. A modification or repair affects the hubs or axles and:

- a) is not excluded from the requirements for HVS certification (Table 10-2-2), or
- b) the modification is not for the purpose of law enforcement or the provision of emergency services, or
- c) is missing proof of HVS certification, ie:
 - i. the vehicle was modified or repaired before the last CoF inspection and no LANDATA record has been entered, or
 - ii. the vehicle was modified or repaired since the last CoF inspection and no valid LT400 form from a HVS certifier of category HVEC, HVMC or HVIC has been presented.

Table 10-2-2. Requirements for HVS certification

HVS certification is required	HVS certification is not required
<ol style="list-style-type: none"> 1. An axle that is modified, including a replacement axle that is not identical to the one fitted by the vehicle manufacturer 2. Fitting of an additional axle 3. A retractable axle 	<ol style="list-style-type: none"> 1. Any modification or repair likely to have been carried out before 1/1/1997, (modifications and repairs before this date generally required certification but for inspection purposes no evidence of this is required.) 2. Any repair or modification not listed in the left-hand column unless the VI considers that certification is required because the modification or repair has affected the vehicle's safety performance (a second opinion from an expert may be needed, eg the manufacturer's representative, reputable workshop).

Note 1 For specialist overdimension vehicles, none of the equipment RfRs or SoLs apply except numbers 2 and 7, ie, axle sets must be load sharing, and axle mass re-distribution devices must meet specified requirements.

Note 2 An alarm must be visible or audible from the driver's seating position, and the alarm must operate when the vehicle's engine is running, except when the parking brake is fully applied or when the gear selector of a vehicle with an automatic transmission is in the 'park' position.

Note 3 Definitions

Load-sharing axle set means an axle set suspension system that has effective damping characteristics on all axles of the set and is built to divide the load between the tyres on the set so that no tyre carries a mass more than 10% greater than the mass it would carry if:

- a) the load were divided in the axle set so that each tyre carries an equal load, or
- b) the axle set is a tandem axle set comprising a twin-tyred axle and a large single-tyred axle and is built to divide the load between the tyres on the set so that:
 - i. 60% of the load is borne by the twin-tyred axle and 40% of the load is borne by the large single-tyred axle, or
 - ii. 55% of the load is borne by the twin-tyred axle and 45% of the load is borne by the large single-tyred axle.

Retractable axle means an axle that has a convenient adjustment to allow the axle load distribution of the axle set to be varied substantially. An axle that is retracted is not considered to be part of the axle set.

Specialist overdimension vehicle means

- a) a vehicle designed primarily to transport overdimension or overweight loads, or
- b) a vehicle whose primary purpose is to carry out a specialist function that requires overdimension equipment, and:
 - i. dismantling of the vehicle's equipment would make the equipment unusable for its intended purpose, or
 - ii. it would take more than four hours to dismantle the vehicle's equipment.

Summary of legislation

Applicable legislation

- Land Transport Rule: Vehicle Equipment 2004

Mandatory equipment

1. A vehicle must be fitted with a mudguard over each road wheel if it is reasonable and practicable to do so (**Note 1**).
2. A mudguard must cover no less than the width of the tyre tread on each road wheel (**Figure 10-3-1 and Figure 10-3-2**).
3. A vehicle fitted with twin tyres or close-spaced multiple tyres must be fitted with a mudguard over each wheel on the rear axle that provides continuous protection from a horizontal line tangent to the top of the tyre tread (**Note 2**) to a line with a slope of 1:3 rising rearward from the tyre's contact point on the road (**Figure 10-3-3**).
4. A vehicle designed for industrial purposes may be fitted with partial mudguards if the vehicle's construction makes it impracticable to fit full mudguards.
5. The following vehicles are not required to be fitted with mudguards:
 - a) a vehicle in an unfinished condition used under the authority of trade plates and operated in accordance with the Compliance Rule
 - b) a vehicle not capable of exceeding a speed of 30 km/h
 - c) a vehicle with a valid LVV authority card (**Figure 10-3-4**).

Mudguard condition

6. A mudguard must be securely fixed to the vehicle and must be constructed so that it does not present a hazard to road users.

Modification

7. A modification that affects a mudguard must be inspected and certified by a low volume vehicle specialist certifier, unless the vehicle:
 - a) is excluded from the requirement for LVV certification (**Table 10-3-1**), and
 - b) has been inspected in accordance with the requirements in this manual, including those for equipment, condition and performance.

Reasons for rejection

Mandatory equipment

1. A mudguard over a road wheel is missing where it is reasonable and practicable to fit a mudguard, unless the vehicle is:
 - a) in an unfinished condition legally used under the authority of trade plates, or
 - b) not capable of exceeding a speed of 30 km/h, or
 - c) has a valid mudguard exemption issued by the NZ Hot Rod Association (**Figure 10-3-4**).
2. A mudguard does not cover the full tread width (**Note 2**) of a tyre or tyres fitted to a road wheel (**Figure 10-3-1 and Figure 10-3-2**), except when the mudguard is fitted to a vehicle designed for industrial purposes and it is not practicable to fit a full mudguard due to the vehicle's construction.
3. On a vehicle with twin or close-spaced multiple tyres a mudguard fitted over a wheel on the rear axle is more than one-third higher than the horizontal distance between the vertical lines of the lowest point of the mudguard and the centre of the wheel (**Figure 10-3-3**), except when:
 - a) the mudguard is fitted to a vehicle designed for industrial purposes and it is not practicable to fit a full mudguard due to the vehicle's construction.

Mudguard condition

4. A mudguard is not securely fixed to the vehicle.
5. A mudguard is so constructed or damaged that it is likely to present a hazard to road users.

Modification

6. A modification affects a mudguard, and:
 - a) is not excluded from the requirements for LVV specialist certification (**Table 10-3-1**), and
 - b) is missing proof of LVV certification, ie:
 - i. the vehicle is not fitted with a valid low volume vehicle certification plate, or
 - ii. the operator is not able to produce a valid modification declaration or authority card.

Fitting of or modification to:	LVV certification is never required:
Modified mudguards, including flared wheel arches or the addition of mudguard extensions ¹	<ul style="list-style-type: none"> in-service requirements for condition and performance must be met. (See also Table 10-1-1.)
Any modification for the purposes of law enforcement or the provision of emergency services	

¹ Some vehicles fitted with flared wheel arches or mudguard extensions will require LVV certification as a result of aftermarket wheel fitments and tyre size changes. See **Table 10-1-1**.

Note 1 Definitions

Mudguard means a fitting, inclusive of any portion of the vehicle and of any mudflaps attached, that serves to intercept material thrown up by a wheel more or less on the plane of the wheel.

Tyre tread means the portion of a tyre that contacts the road.

Modify means to change a vehicle from its original state by altering, substituting, adding or removing a structure, system, component or equipment, but does not include repair.

Repair means to restore a damaged or worn vehicle, its structure, systems, components or equipment to within safe tolerance of its condition when manufactured, including replacement with undamaged or new structures, systems, components or equipment.

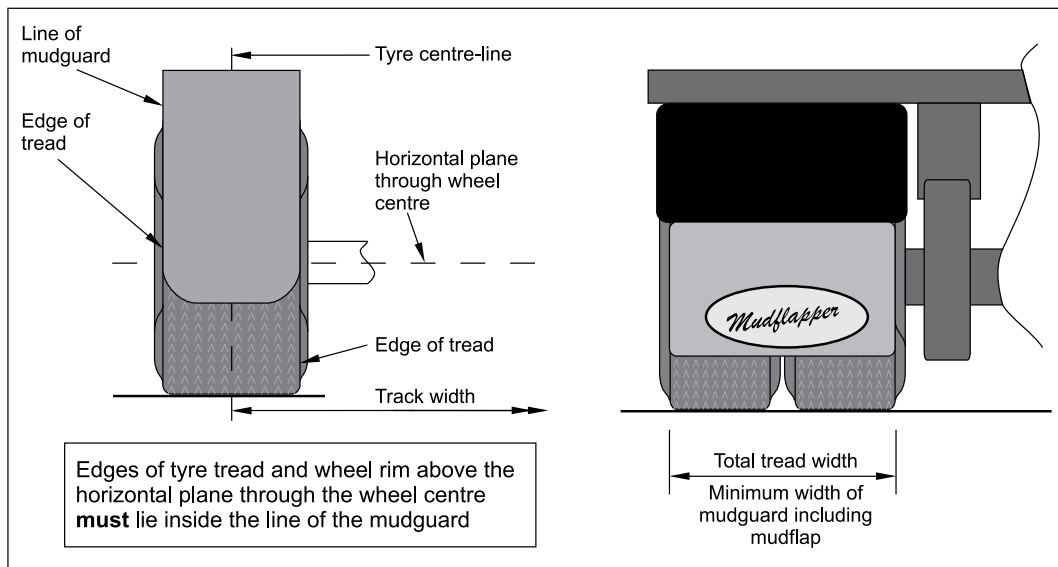


Figure 10-3-1. Position of individual mudguard in relation to tyre tread

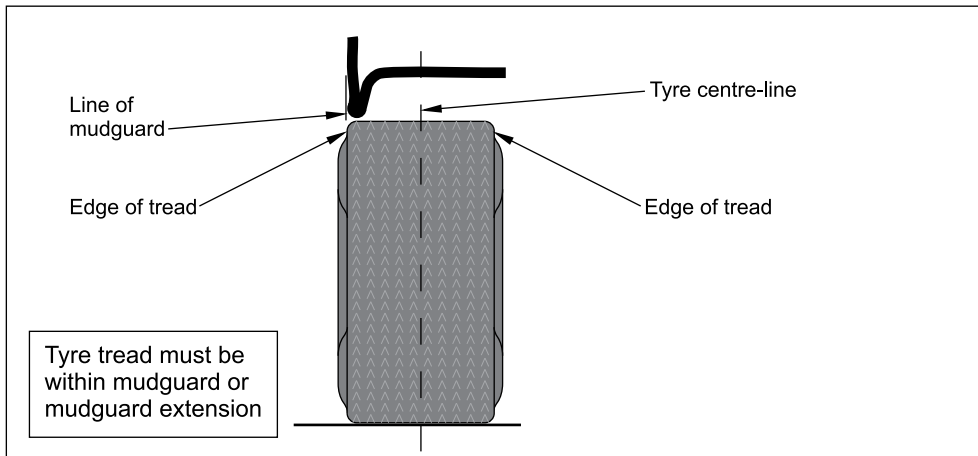


Figure 10-3-2. Position of body panel mudguard in relation to tyre tread

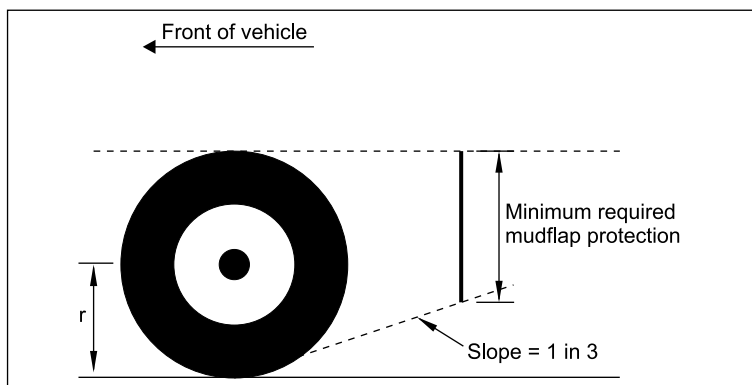


Figure 10-3-3. Size and position of mudguards for the rear wheels of a vehicle fitted with dual wheels or close-spaced multiple wheels

<p>LAND transport safety AUTHORITY</p>	<p>NEW ZEALAND LAND TRANSPORT AUTHORITY HOT ROD ASSOCIATION INC.</p>	<p>Name N.Z.H.R.A. Affiliation No. N.Z.H.R.A. Club</p> <p>Registration No. Vehicle Make Model Year</p> <p>L.V.V. Compliance Plate No. Authority No.</p>
<p>MUDGUARD EXEMPTION AUTHORITY</p>		<p>Issued by The New Zealand Hot Rod Association Valid Until</p>
<p>Under the provisions of the Traffic Regulations 1976 the vehicle referred to over-leaf is entitled to be operated on public roads without mudguards (fenders) for the duration of the exemption's validity period.</p>		<p>Issued by The New Zealand Hot Rod Association Valid Until</p>

Figure 10-3-4. LVV Authority Card: NZ Hot Rod Mudguard Exemption

